


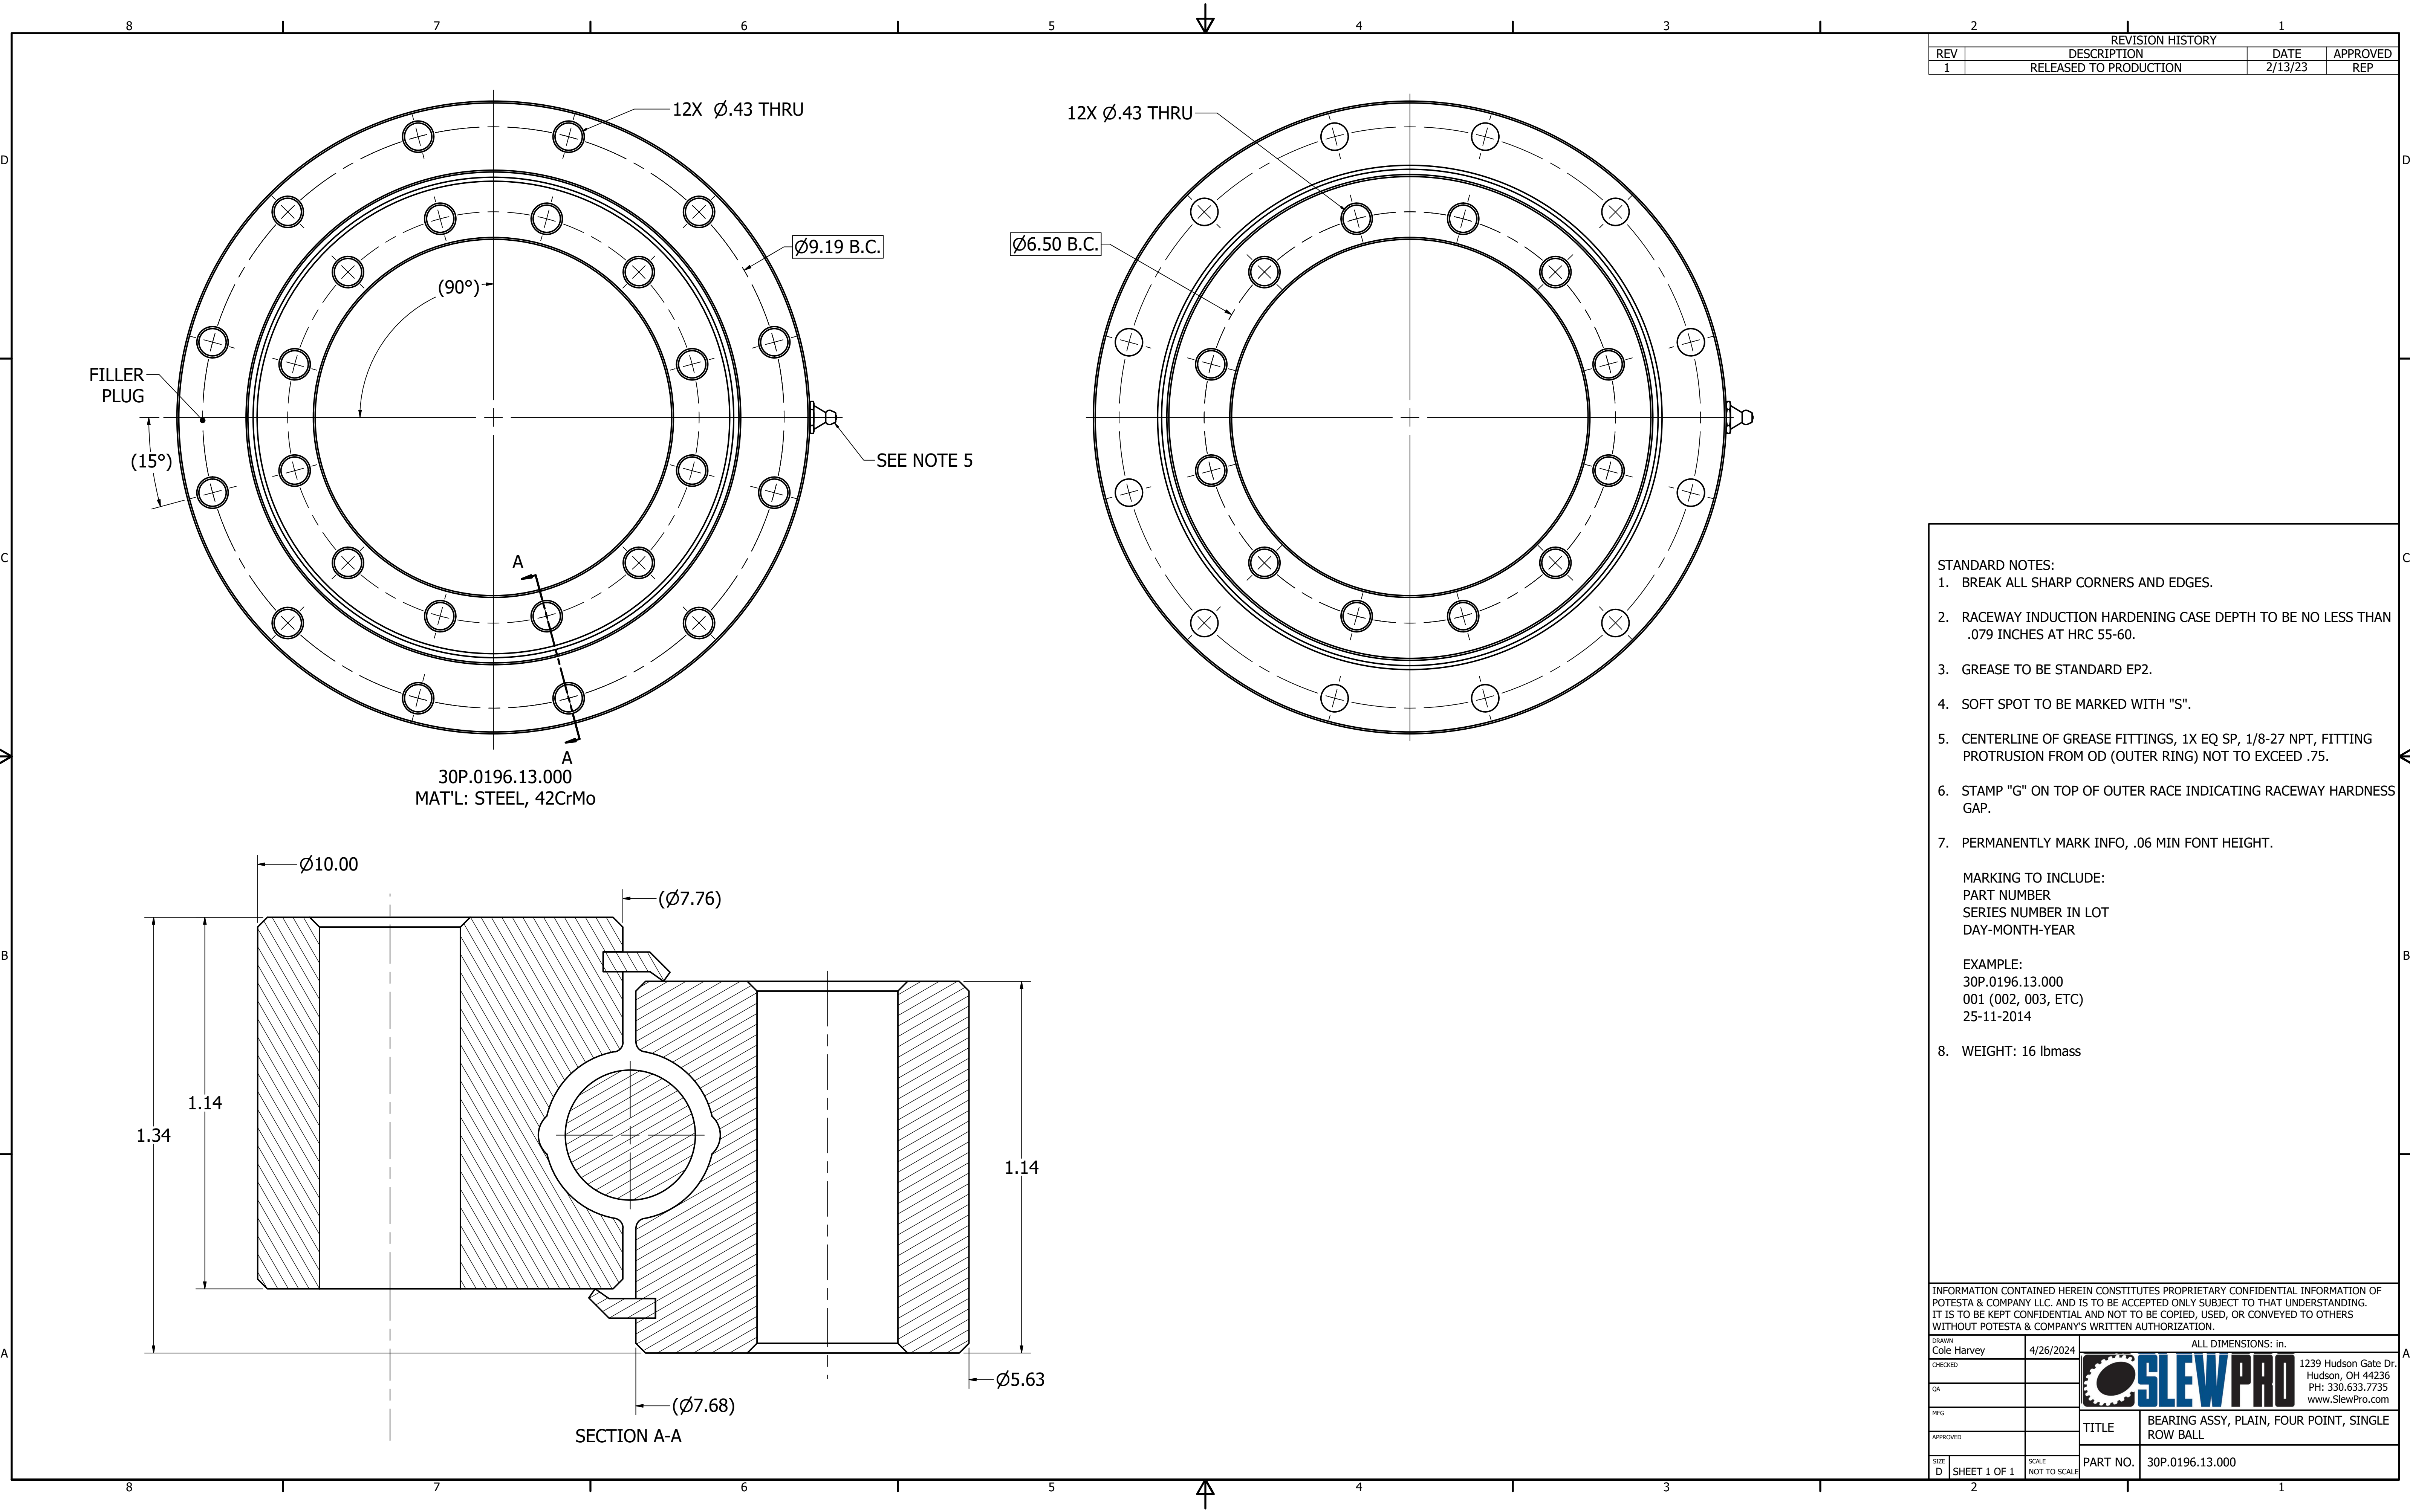

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
1	RELEASED TO PRODUCTION	2/13/23	REP

- STANDARD NOTES:
1. BREAK ALL SHARP CORNERS AND EDGES.
 2. RACEWAY INDUCTION HARDENING CASE DEPTH TO BE NO LESS THAN .079 INCHES AT HRC 55-60.
 3. GREASE TO BE STANDARD EP2.
 4. SOFT SPOT TO BE MARKED WITH "S".
 5. CENTERLINE OF GREASE FITTINGS, 1X EQ SP, 1/8-27 NPT, FITTING PROTRUSION FROM OD (OUTER RING) NOT TO EXCEED .75.
 6. STAMP "G" ON TOP OF OUTER RACE INDICATING RACEWAY HARDNESS GAP.
 7. PERMANENTLY MARK INFO, .06 MIN FONT HEIGHT.
 8. WEIGHT: 16 lbmass


MARKING TO INCLUDE:

PART NUMBER
SERIES NUMBER IN LOT
DAY-MONTH-YEAR

EXAMPLE:

30P.0196.13.000
001 (002, 003, ETC)
25-11-2014

INFORMATION CONTAINED HEREIN CONSTITUTES PROPRIETARY CONFIDENTIAL INFORMATION OF POTESTA & COMPANY LLC. AND IS TO BE ACCEPTED ONLY SUBJECT TO THAT UNDERSTANDING. IT IS TO BE KEPT CONFIDENTIAL AND NOT TO BE COPIED, USED, OR CONVEYED TO OTHERS WITHOUT POTESTA & COMPANY'S WRITTEN AUTHORIZATION.

DRAWN Cole Harvey		4/26/2024	ALL DIMENSIONS: in.	
CHECKED			 1239 Hudson Gate Dr. Hudson, OH 44236 PH: 330.633.7735 www.SlewPro.com	
QA				
MFG				
APPROVED				
SIZE D		SHEET 1 OF 1		SCALE NOT TO SCALE
		TITLE		BEARING ASSY, PLAIN, FOUR POINT, SINGLE ROW BALL
		PART NO.		30P.0196.13.000