


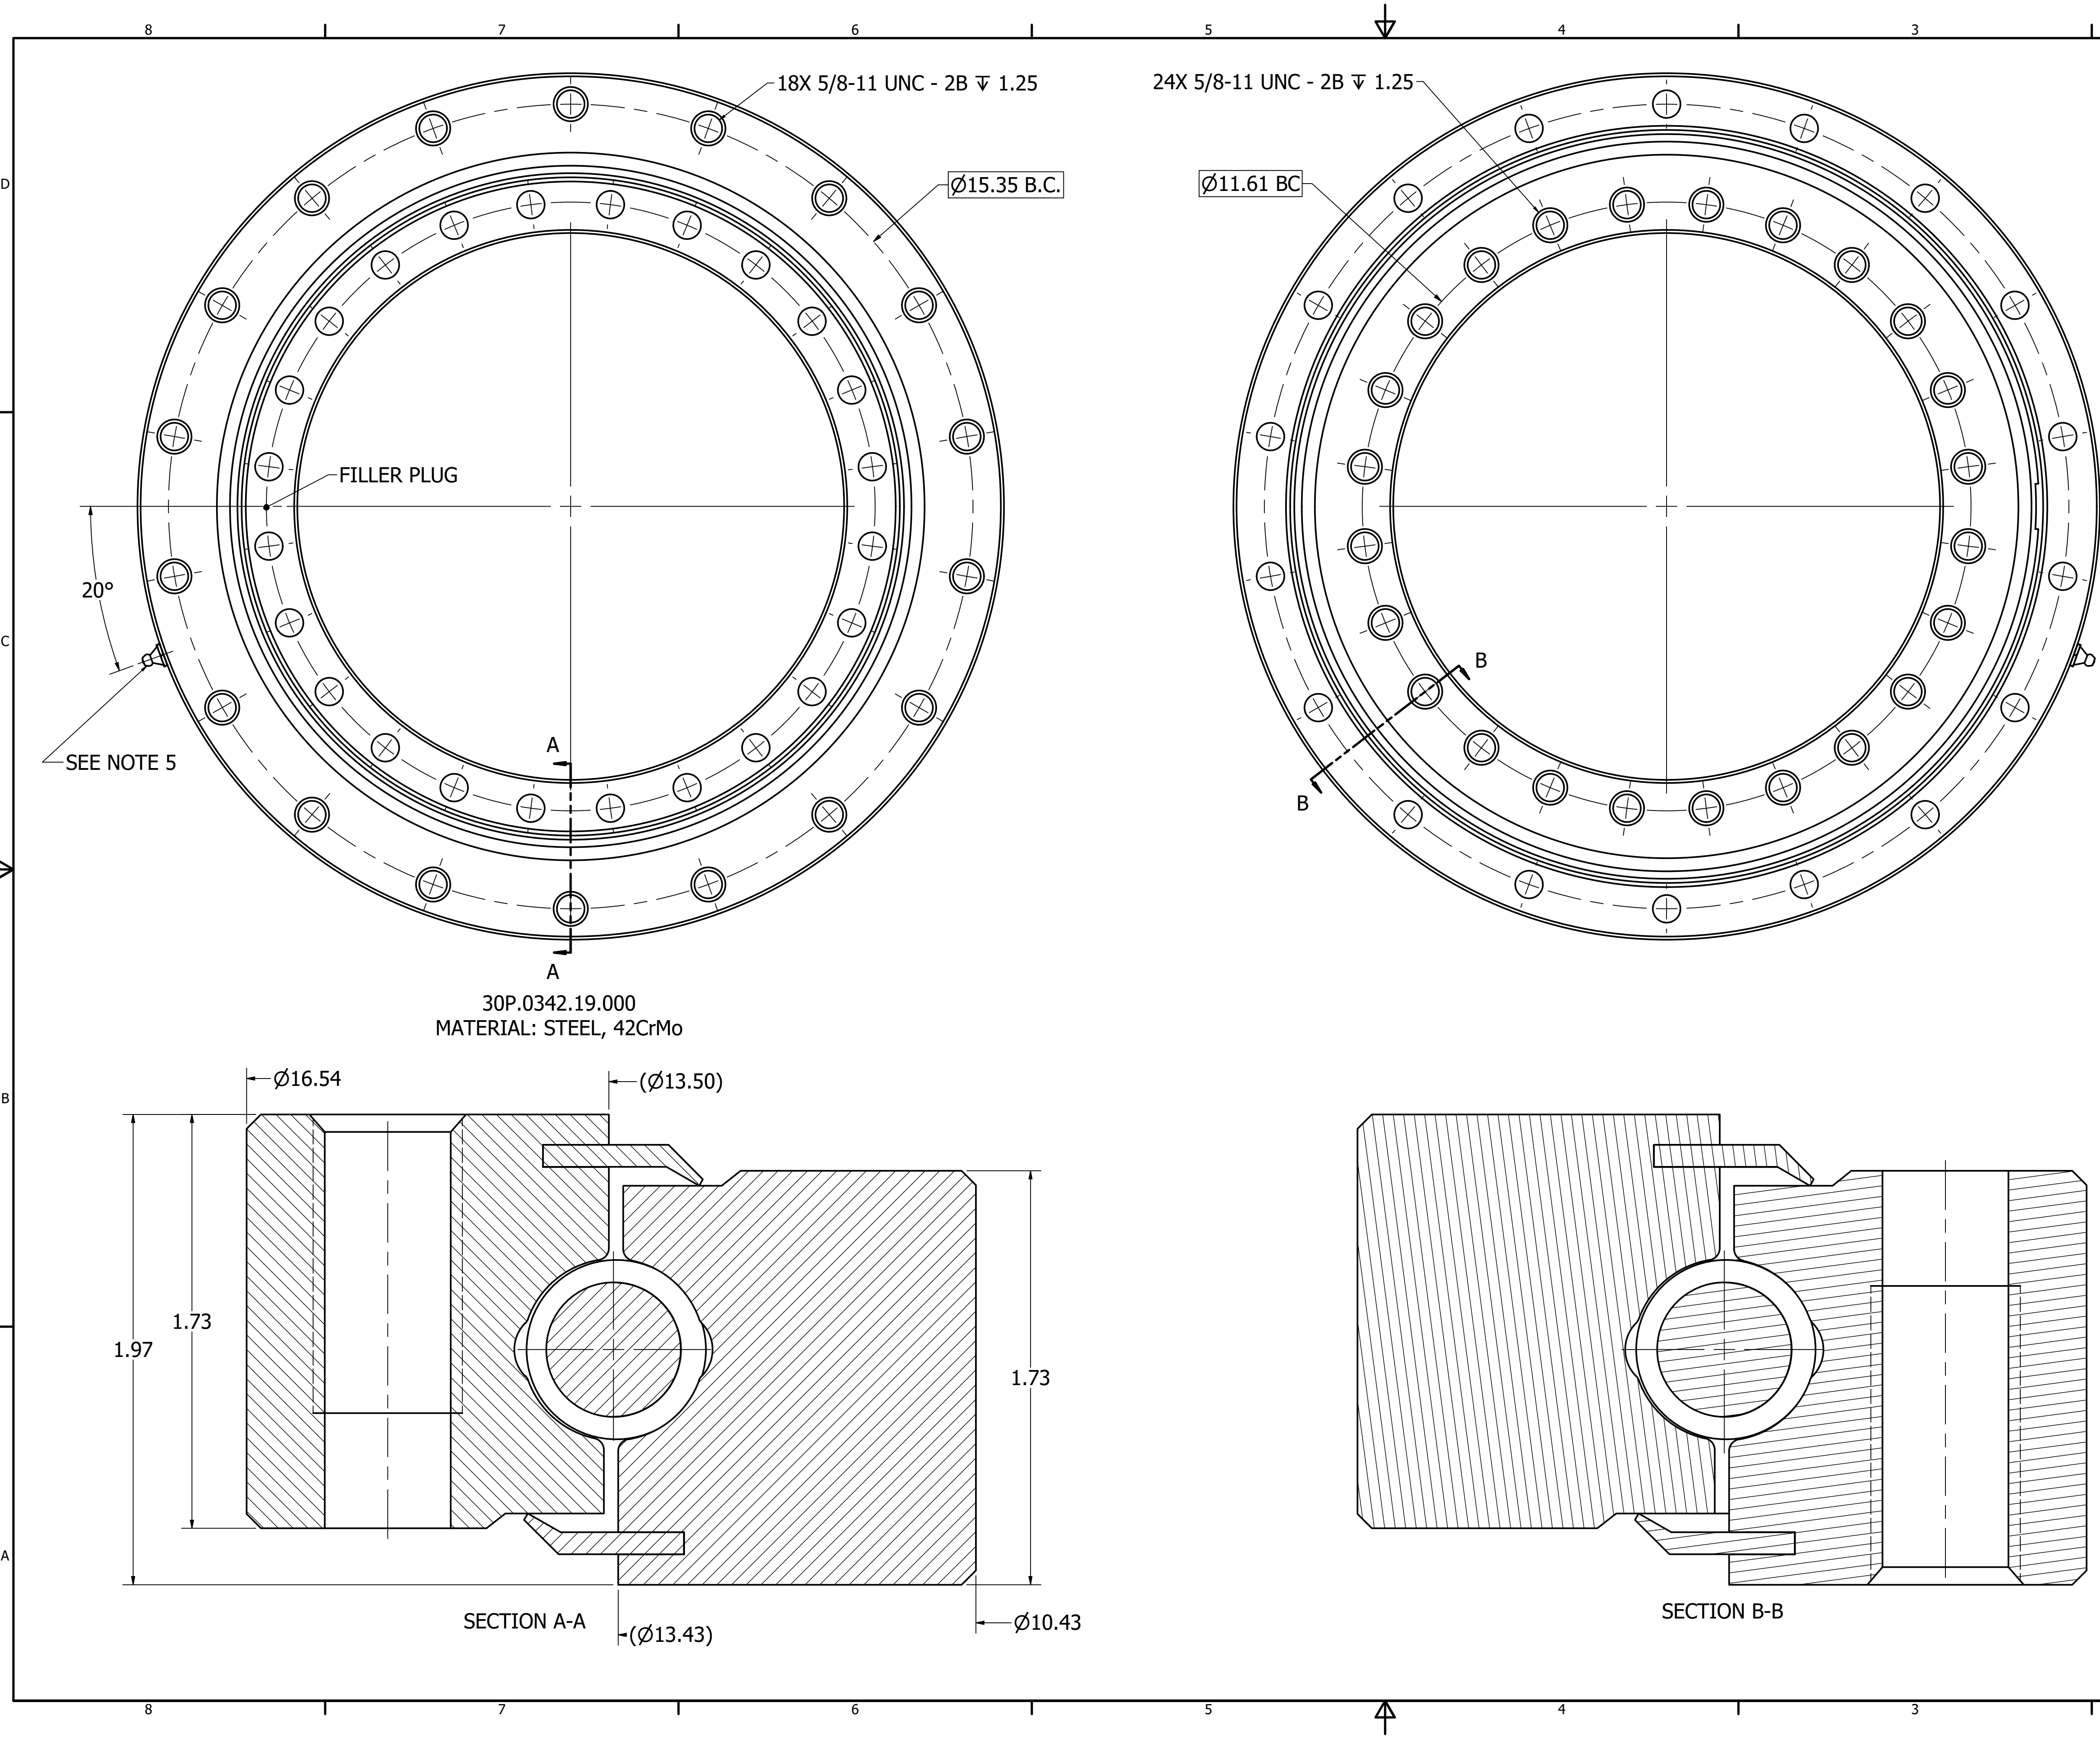

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	RELEASED TO PRODUCTION	04/24/2024	REP

- STANDARD NOTES:
- BREAK ALL SHARP CORNERS AND EDGES.
 - RACEWAY INDUCTION HARDENING CASE DEPTH TO BE NO LESS THAN .118 INCHES AT HRC 55-62.
 - GREASE TO BE STANDARD EP2.
 - SOFT SPOT TO BE MARKED WITH "S".
 - CENTERLINE OF GREASE FITTINGS, X 1/8-27 NPT, FITTING PROTRUSION FROM OD (OUTER RING) NOT TO BE GREATER THAN .75.
 - STAMP "G" ON TOP OF OUTER RACE INDICATING RACEWAY HARDNESS GAP.
 - PERMANENTLY MARK INFO, .06 MIN FONT HEIGHT.
- MARKING TO INCLUDE:
- PART NUMBER
 - SERIES NUMBER IN LOT
 - DAY-MONTH-YEAR
- EXAMPLE:
- 30P.0342.19.000
001 (002, 003, ETC)
25-11-2014
8. WEIGHT: 57 lbmass

INFORMATION CONTAINED HEREIN CONSTITUTES PROPRIETARY CONFIDENTIAL INFORMATION OF POTESTA & COMPANY LLC. AND IS TO BE ACCEPTED ONLY SUBJECT TO THAT UNDERSTANDING. IT IS TO BE KEPT CONFIDENTIAL AND NOT TO BE COPIED, USED, OR CONVEYED TO OTHERS WITHOUT POTESTA & COMPANY'S WRITTEN AUTHORIZATION.

DRAWN Gregg VanSuch	4/24/2024	ALL DIMENSIONS: in.	
CHECKED			1239 Hudson Gate Dr. Hudson, OH 44236 PH: 330.633.7735 www.SlewPro.com
QA			
MFG			
APPROVED			
SIZE D	SHEET 1 OF 1	SCALE NOT TO SCALE	PART NO. 30P.0342.20.000